


TM58 / TM58S

Dynamic Handheld Microphone Series




TM58 series cardioid dynamic microphones are able to deliver authentic sound without any unnecessary sound coloration which are designed for speech and performance. Equipped with tailored diaphragm and precise directivity, TM58 series give full and powerful sound. The higher SPL and high-grade transient response of TM58 series compared with other microphones will make the stage performance strong and the penetrating. TM58 is the correct choice for the perfectionists no matter outdoors or indoors, speech or performance.

- Balanced and clear true sound
- Frequency response is good for intelligent recognition and the mid- high frequency band is bright, the low frequency band is solid powerful
- High SPL capacity
- On/off switch with locking function
- Newly-designed capsule shock mount

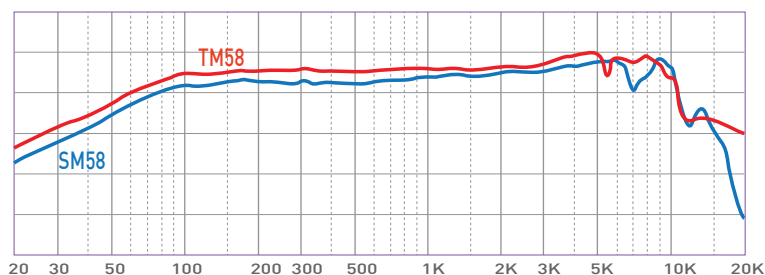


TM58

Type : Dynamic microphone
Polar pattern : Unidirectional (Cardioid) , rotationally symmetrical about microphone axis, uniform with frequency.
Frequency response : 50 to 18,000 Hz
Sensitivity : (at 1,000 Hz Open Circuit Voltage) -53 ± 2 dB , $1\text{Pa} = 94$ dB SPL
Rated impedance : 500Ω
Max. SPL ($1\text{ k}\Omega$ load) : 155 dB SPL ($\text{THD} \leq 1\%$ 1kHz)
Connector : Integral 3 pin male XLR type
Finish : Metal structure, grey, enamel-painted, matte finished
Dimensions : $\Phi 51.0\text{mm} \times 163.0\text{mm}$ (2.00 in. x 6.41 in.) Net weight : 320 g

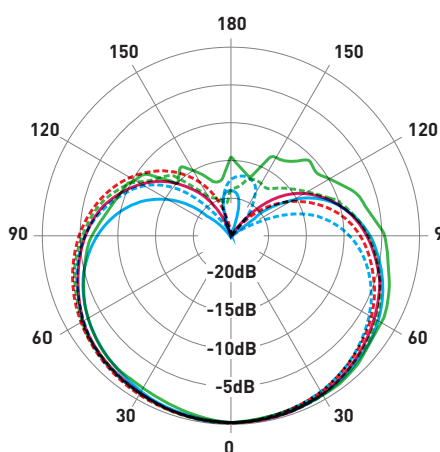

TM58 125Hz
SM58 125Hz
TM58 500Hz
SM58 500Hz
TM58 1000Hz
SM58 1000Hz

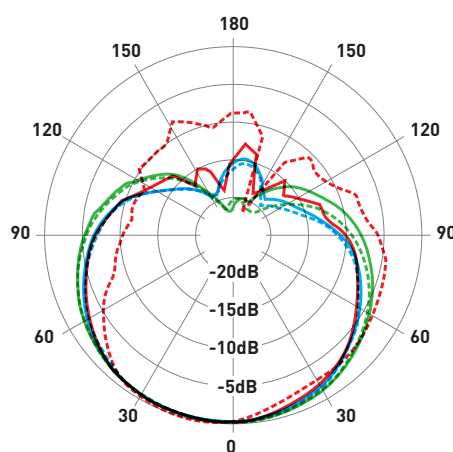

TM58 2000Hz
SM58 2000Hz
TM58 4000Hz
SM58 4000Hz
TM58 8000Hz
SM58 8000Hz

TM58 / S - Interim Catalogue 暫行目錄

*Specifications are subject to change without notice
*設計和規格如有更改，恕不另行通知

www.superlux.com.tw